

# MODERN TECHNOLOGY FOR EVERYONE



## WEB BASED D-300

The D-300 is a cost effective comprehensive genset controller ready for internet monitoring.

### FEATURES

- Diesel and gas genset support
- 400Hz operation support
- 400 event logs, full snapshot
- All parameters front panel editable
- 3 level configuration password
- 128x64 graphical LCD display
- Downloadable languages
- Waveform display of V & I
- Harmonic analysis of V & I
- 16Amp MCB & GCB outputs
- 8 configurable digital inputs
- 6 configurable digital outputs
- 3 configurable analog inputs
- Both CANBUS-J1939 & MPU
- 3 configurable service alarms
- Multiple automatic exerciser
- Weekly operation schedule
- Dual mutual standby with equal aging of gensets
- Manual "speed fine adjust" on selected ECUs
- Automatic fuel pump control
- Disable protections feature
- Excess power protection
- Reverse power protection
- Overload IDMT protection
- Load shedding, dummy load
- Multiple load management
- Current unbalance protection
- Voltage unbalance protection
- Fuel filling & fuel theft alarms
- Battery back-up real time clock
- Idle speed control
- Battery charge run enabled
- Combat mode support
- Multiple nominal conditions
- Contactor & MCB drive
- 4 quadrant genset power counters
- Mains power counters
- Fuel filling counter
- Fuel consumption counter
- Modem diagnostics display
- Configurable through USB, RS-232 and GPRS
- Free configuration program
- Allows SMS controls
- Ready for central monitoring
- Mobile genset support
- Automatic GSM geo-location
- GPS connectivity (RS232)
- Easy USB firmware upgrade
- IP65 rating with optional gasket

### MEASUREMENTS

- Mains & genset PN/PP voltages
- Mains & genset frequency
- Mains & genset phase currents
- Mains & genset neutral currents
- Mains & genset, phase & total, kW, kVA, kVAr, pf
- Engine speed
- Battery voltage

### COMMUNICATION

- 4-band GPRS modem (optional)
- USB Device
- RS-232 (2400-57600baud)
- J1939-CANBUS
- Geo-locating through GSM
- GPS support (RS-232)
- Internet Central Monitoring
- SMS message sending
- E-mail sending
- Free PC software: Rainbow Plus
- Modbus RTU

### FUNCTIONALITIES


- AMF unit
- ATS unit
- Remote start controller
- Manual start controller
- Engine controller
- Remote display panel

### TOPOLOGIES

- 3 ph 4 w, star & delta
- 3 ph 3 w, 2 CTs
- 2 ph 3 w
- 1 phase 2 wires



## COMMUNICATIONS

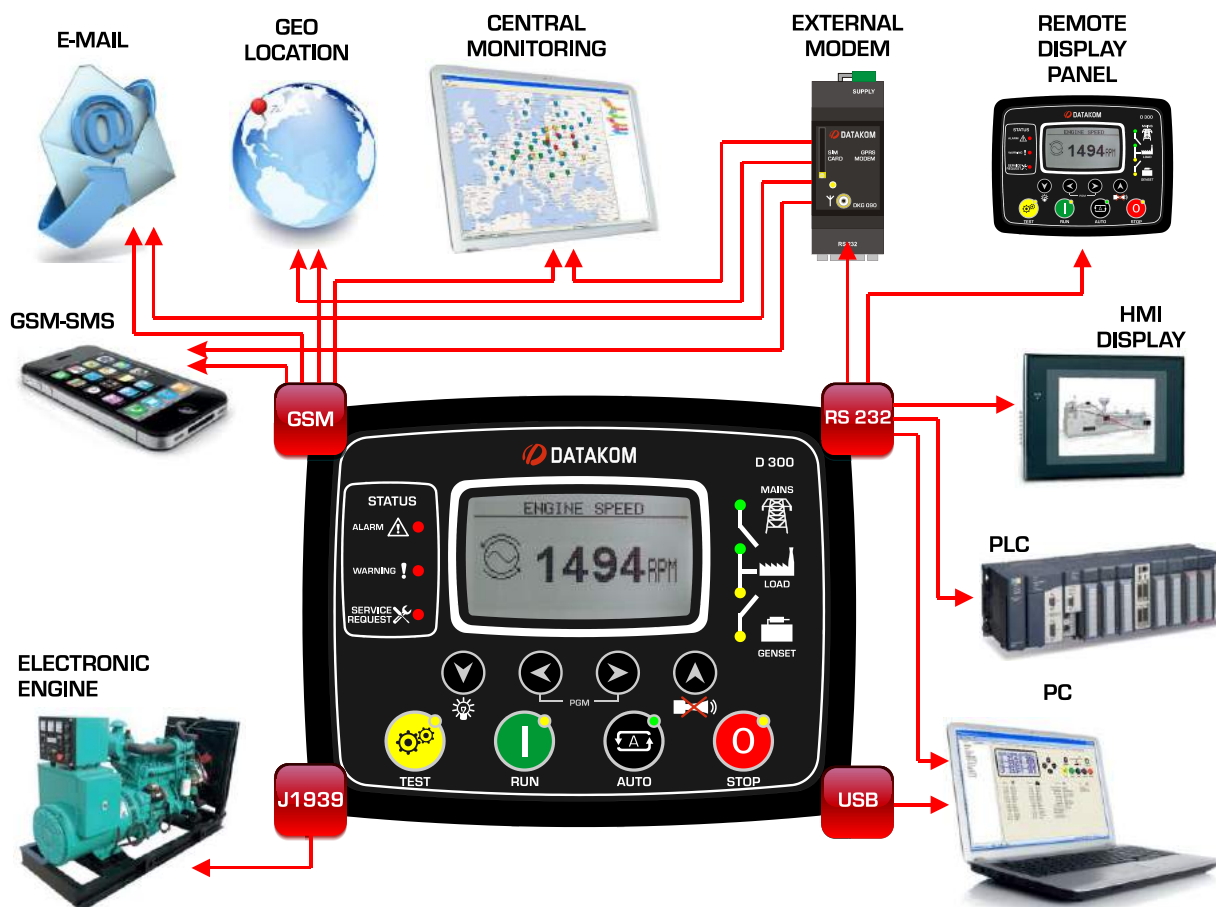

## TECHNICAL SPECIFICATIONS

**Alternator voltage:** 0 to 300 V-AC (Ph-N)  
**Alternator frequency:** 0-600 Hz.  
**Mains voltage:** 0 to 300 V-AC (Ph-N)  
**Mains frequency:** 0-600 Hz.  
**Topology:** 1-2-3 phases, with or without neutral  
**DC Supply Range:** 8.0 to 36.0 V-DC.  
**V-A-cos Accuracy:** 0.5% + 1 digit  
**kW-kVA-kVAr Accuracy:** 1.0% + 1 digit  
**Current consumption:** 500 mA-DC max @ 12V-DC  
**Current Inputs:** from current transformers. .../5A.  
**Digital inputs:** input voltage 0 to 36 V-DC.  
**Analog input range:** 0-5000 ohms.  
**Mains and genset contactor outputs:** 16Amps@250V  
**DC Outputs:** Protected mosfet semiconductor outputs, rated 1Amp@28V-DC  
**Cranking dropouts:** survives 0V for 100ms.  
**Magnetic pickup voltage:** 0.5 to 50Vpk.  
**Magnetic pickup frequency:** 0 to 20000 Hz.  
**Charge Alternator Excitation:** 2W.  
**Display Screen:** 2.9", 128x64 pixels  
**USB Device:** USB 2.0 Full speed  
**RS-232 Port:** selectable baud rate (2400-57600baud)  
**Operating temperature:** -20°C to 70°C (-4 to +158 °F)  
**Storage temperature:** -40°C to 80°C (-40 to +176°F)

**Maximum humidity:** 95% non-condensing.  
**IP Protection:** IP65 from front panel, IP30 from the rear (with gasket)  
**Dimensions:** 172 x 134 x 46mm (WxHxD)  
**Panel Cut-out Dimensions:** 151 x 111 mm minimum.  
**Weight:** 300 g (approx.)  
**Case Material:** High Temperature, non-flammable ABS/PC  
**Installation:** Flat surface mounting on a Type 1 enclosure. Rear retaining plastic brackets.

## CONFORMITY

### EU Directives Conformity

-2006/95/EC (low voltage)  
 -2004/108/EC (electro-magnetic compatibility)

### Norms of reference:

EN 61010 (safety requirements)  
 EN 61326 (EMC requirements)

### UL & CSA Compatibility:

-UL 6200, Controls for Stationary Engine Driven Assemblies (Certificate # - 20140725-E314374)  
 -CAN/CSA C22.2 No. 14-13 – Industrial Control Equipment

## WAVEFORM DISPLAY & HARMONIC ANALYSIS



Waveform Display



Graphical Harmonics




Digital Harmonics Display

## RAINBOW PLUS PROGRAM



Scada

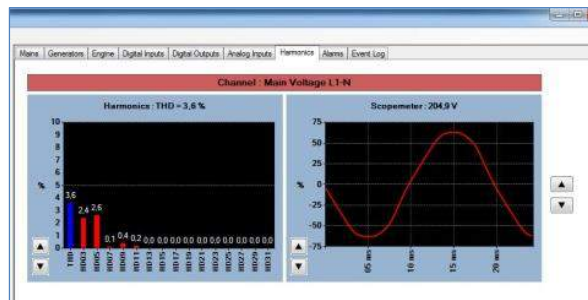

Harmonic analysis & Waveform

## RAINBOW SCADA CENTRAL MONITORING



Fleet Display on Map, online monitoring



Smartphone Support

Summary Information Genset Mains Engine Alarms Control Outputs

Mains L1 : 224.8 V	Genset L1 : 224.6 V	Battery Voltage : 13.50 vdc
Mains L2 : 224.2 V	Genset L2 : 224.3 V	Engine RPM : 1500 RPM
Mains L3 : 226.1 V	Genset L3 : 226.0 V	Oil Pressure : N/A Bar
Mains L1-L2 : 389.0 V	Genset L1-L2 : 388.8 V	Coolant Temp : N/A °C / °F
Mains L2-L3 : 389.8 V	Genset L2-L3 : 389.8 V	Oil Temp : 69.3 °C / 156.7 °F
Mains L3-L1 : 390.3 V	Genset L3-L1 : 390.1 V	Fuel Level : 51.1 %
Mains I1 : 0.0 A	Genset I1 : 160.9 A	Engine Run Hours : 802.17 Hrs
Mains I2 : 0.0 A	Genset I2 : 275.4 A	Total kWh : 332311.1 kWh
Mains I3 : 0.0 A	Genset I3 : 118.7 A	Total kVAh (Ind) : 0.1 kVAh
Mains Freq : 50.02 Hz	Genset Freq : 50.01 Hz	Total kVAh (Cap) : 46245.2 kVAh
Mains P Total : 0.0 kW	Genset P Total : 124.2 kW	Hours to Srv1 : 9512003.35 Hrs
Mains Q Total : 0.0 kVAR	Genset Q Total : -8.0 kVAR	Days to Srv1 : -2684277.95 Day
Mains S Total : 0.0 kVA	Genset S Total : 124.5 kVA	
Mains Pwr Factor : 1.000	Genset Pwr Factor : 0.997	

Real time monitoring

# TYPICAL CONNECTIONS

